



# SOIL MECHANICS

## SAB1713

DR. HETTY





# INTRODUCTION

# SOIL MECHANICS



- Concerned solely with soils
- Concerned with the deformation and strength of bodies of soils
- Concerned with the interaction of structures with their foundation materials (STABILITY & SERVICEABILITY)

“ Soil mechanics is the application of laws of mechanics and hydraulics to engineering problems dealing with sediments and other unconsolidated accumulations of solid particles produced by the mechanical and chemical disintegration of rocks regardless of whether or not they contain an admixture of organic constituent” (Terzaghi, 1948)



# What is Soil???

- Un-aggregated or un-cemented deposits of mineral and/or organic particles or fragments covering large portion of the earth's crust.
- An uncemented aggregate of mineral grains and decayed organic matter (solid particles) with liquid and gas in empty spaces between solid particles. (Das)
- Any uncemented or weakly cemented accumulation of mineral particles formed by the weathering of rock, the void space between the particles containing water and air. (R.F.Craig)

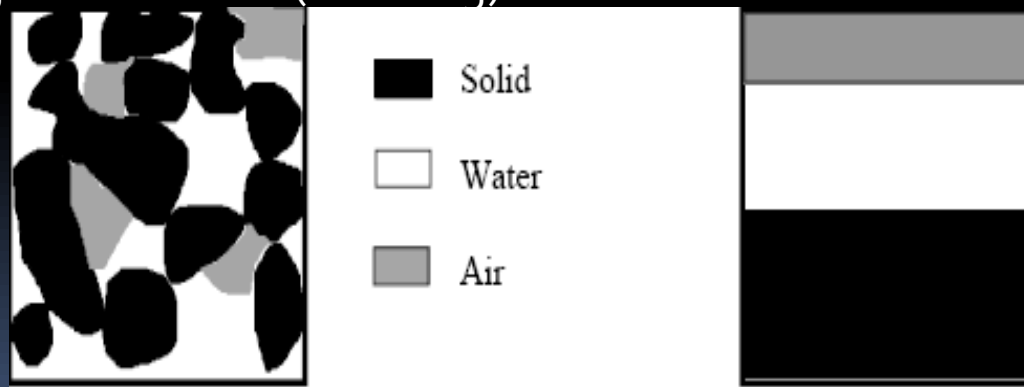


Figure 1: Air, Water and Solid phases in a typical soil



# The Source of Soils??????



# The Differentiation between SOIL & ROCK

- **SOIL** – removed without blasting
- **ROCK** – required blasting



# ROCKS → The Source of Soils

- Soil particles are the result of *weathering* (disintegration and decomposition) of rocks and decay of vegetation.
- Some soil particles may, over a period of time, become consolidated under the weight of overlying material and become rock.

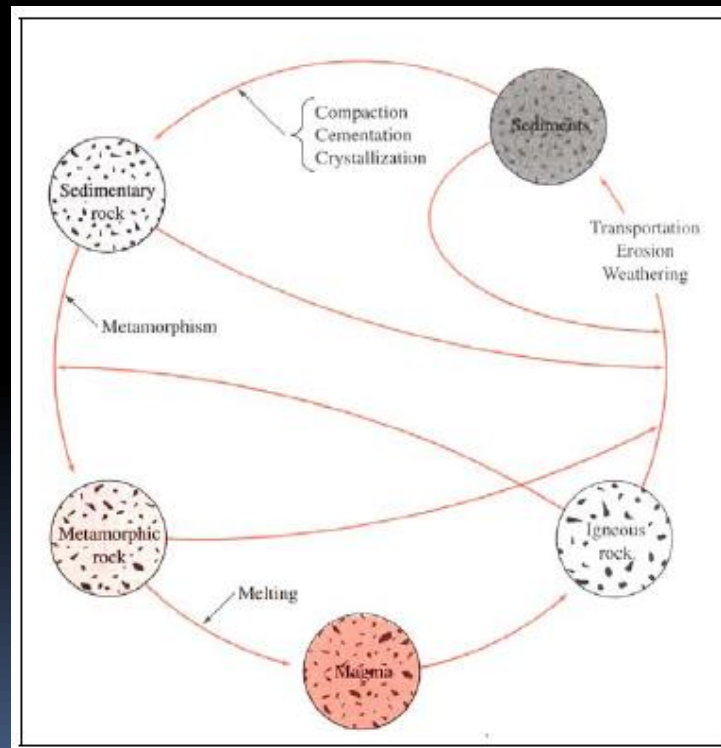


Figure2: Rock Cycle



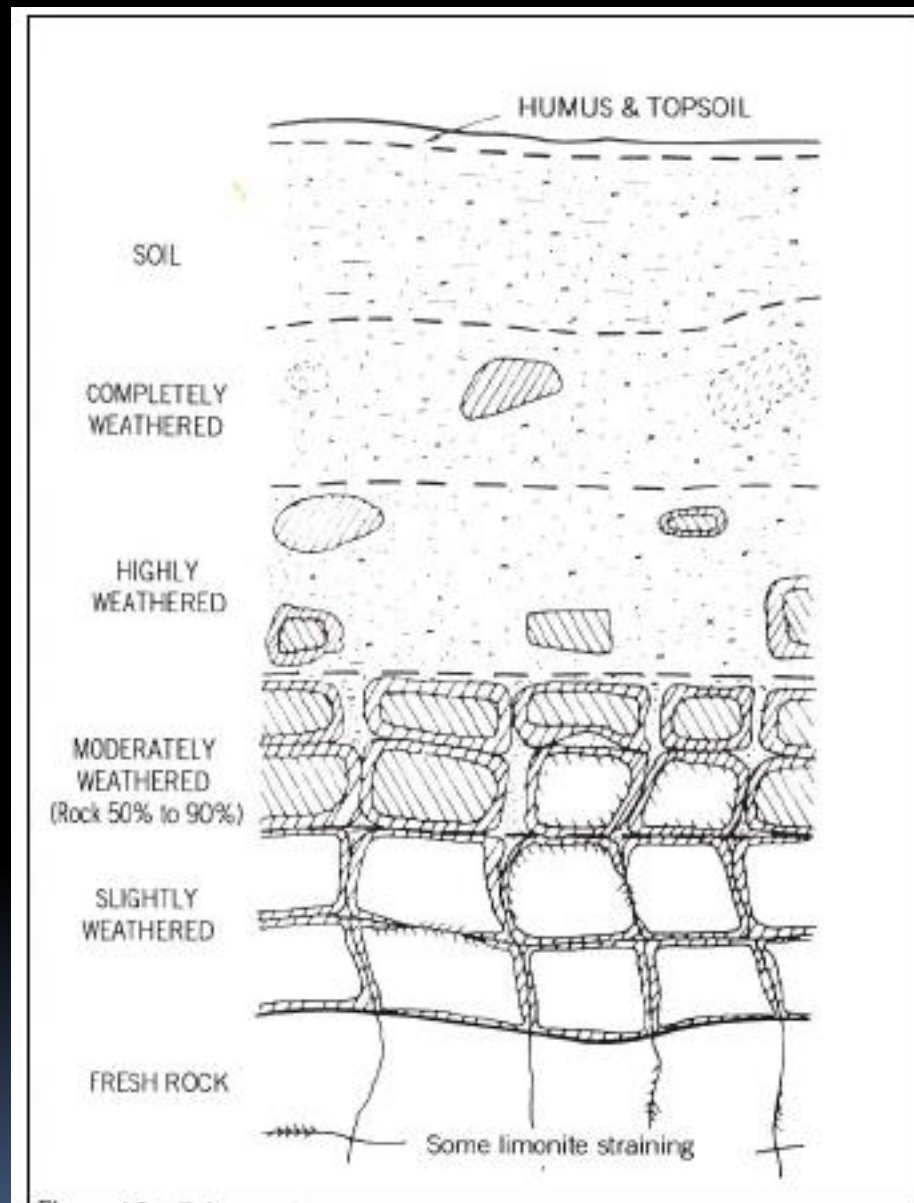


Figure 3: Schematic diagram of a typical residual weathering soil profile







		Fine-grained Granite	Fine Ash Tuff
VI	Residual soils		
V	Completely decomposed		
IV	Highly decomposed		
III	Moderately decomposed		
II	Slightly decomposed		
I	Fresh		



# Weathering Process

- **DISINTEGRATION**  
(Mechanical weathering)

- Disintegrates rocks into small particles by temperature changes, frost action, rainfall, running water, wind, ice, abrasion, and other physical phenomena.


- **DECOMPOSITION**  
(Chemical weathering)

- Chemically decomposed rocks, which can drastically change its physical and chemical characteristics.
- Results from reactions of rock minerals with oxygen, water, acids, salts and.....

# Rock Classification

- Igneous
- Sedimentary
- Metamorphic




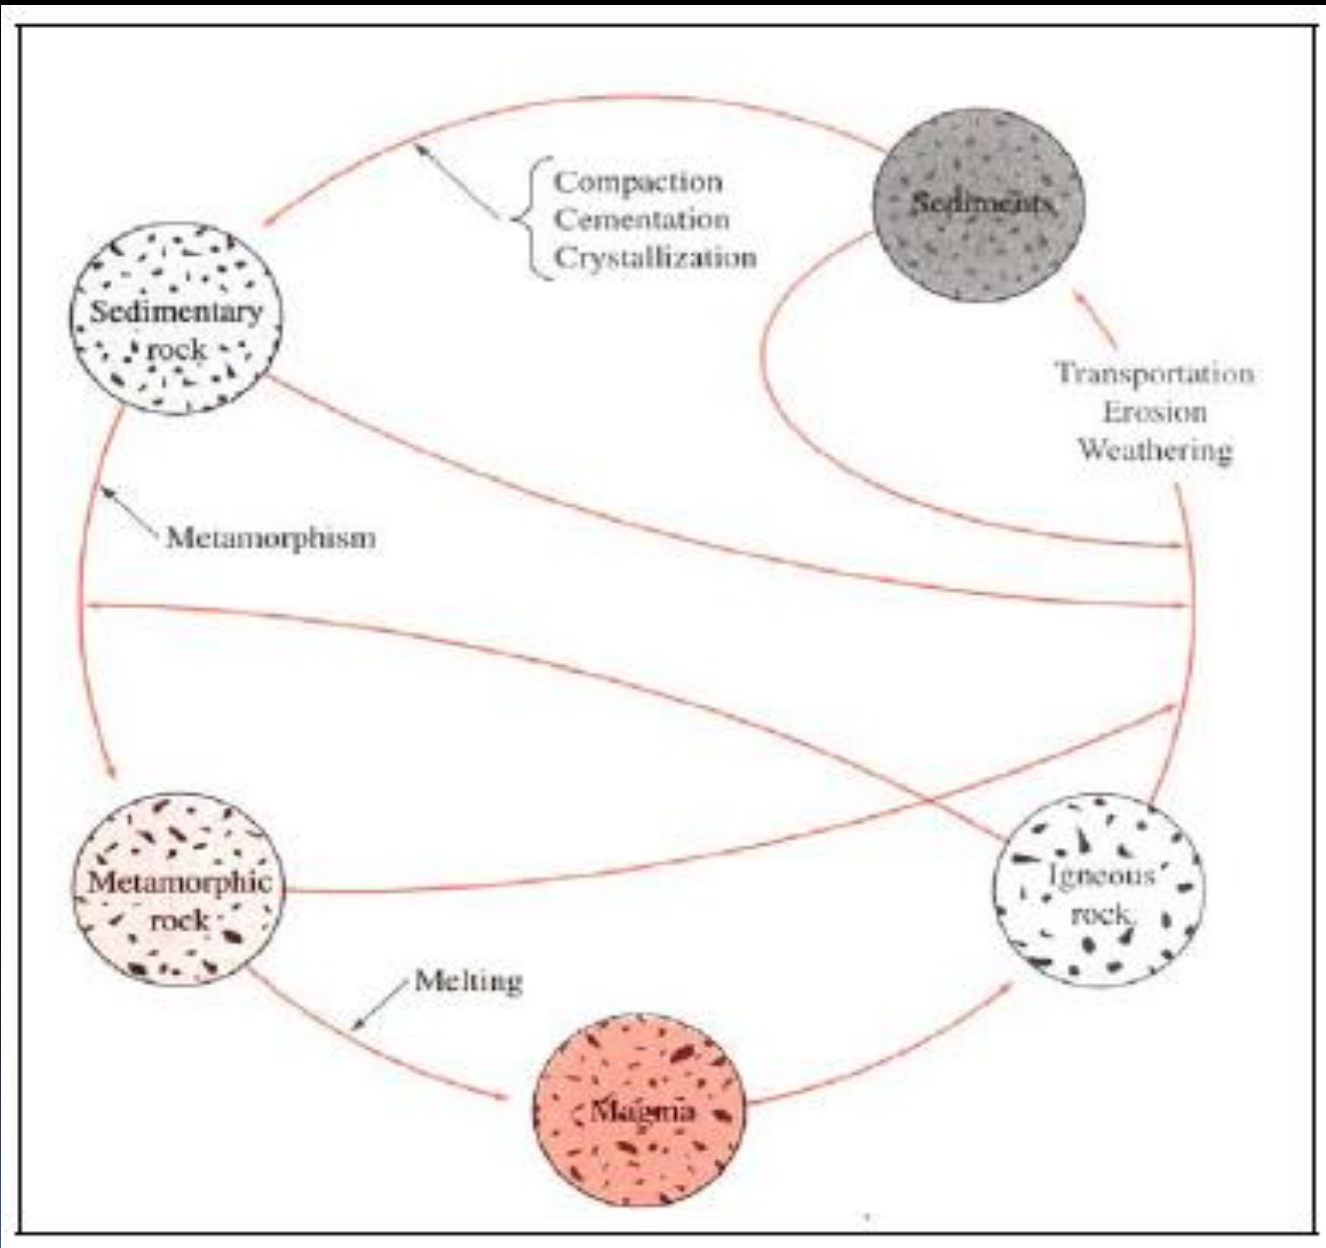

# Igneous Rock

- Formed by the cooling of molten magmas, or by the recrystallization of the older rocks under heat and pressure.
- 2 main classes of igneous rock:
  - Intrusive (cooling and solidifying slowly beneath the earth) – coarse grained
  - Extrusive (poured out at the surface and cooling rapidly) – fine grained
- *Granite and Basalt*
- Hard, Dense and durable
- Good construction materials
- Have high bearing capacity – good for foundation



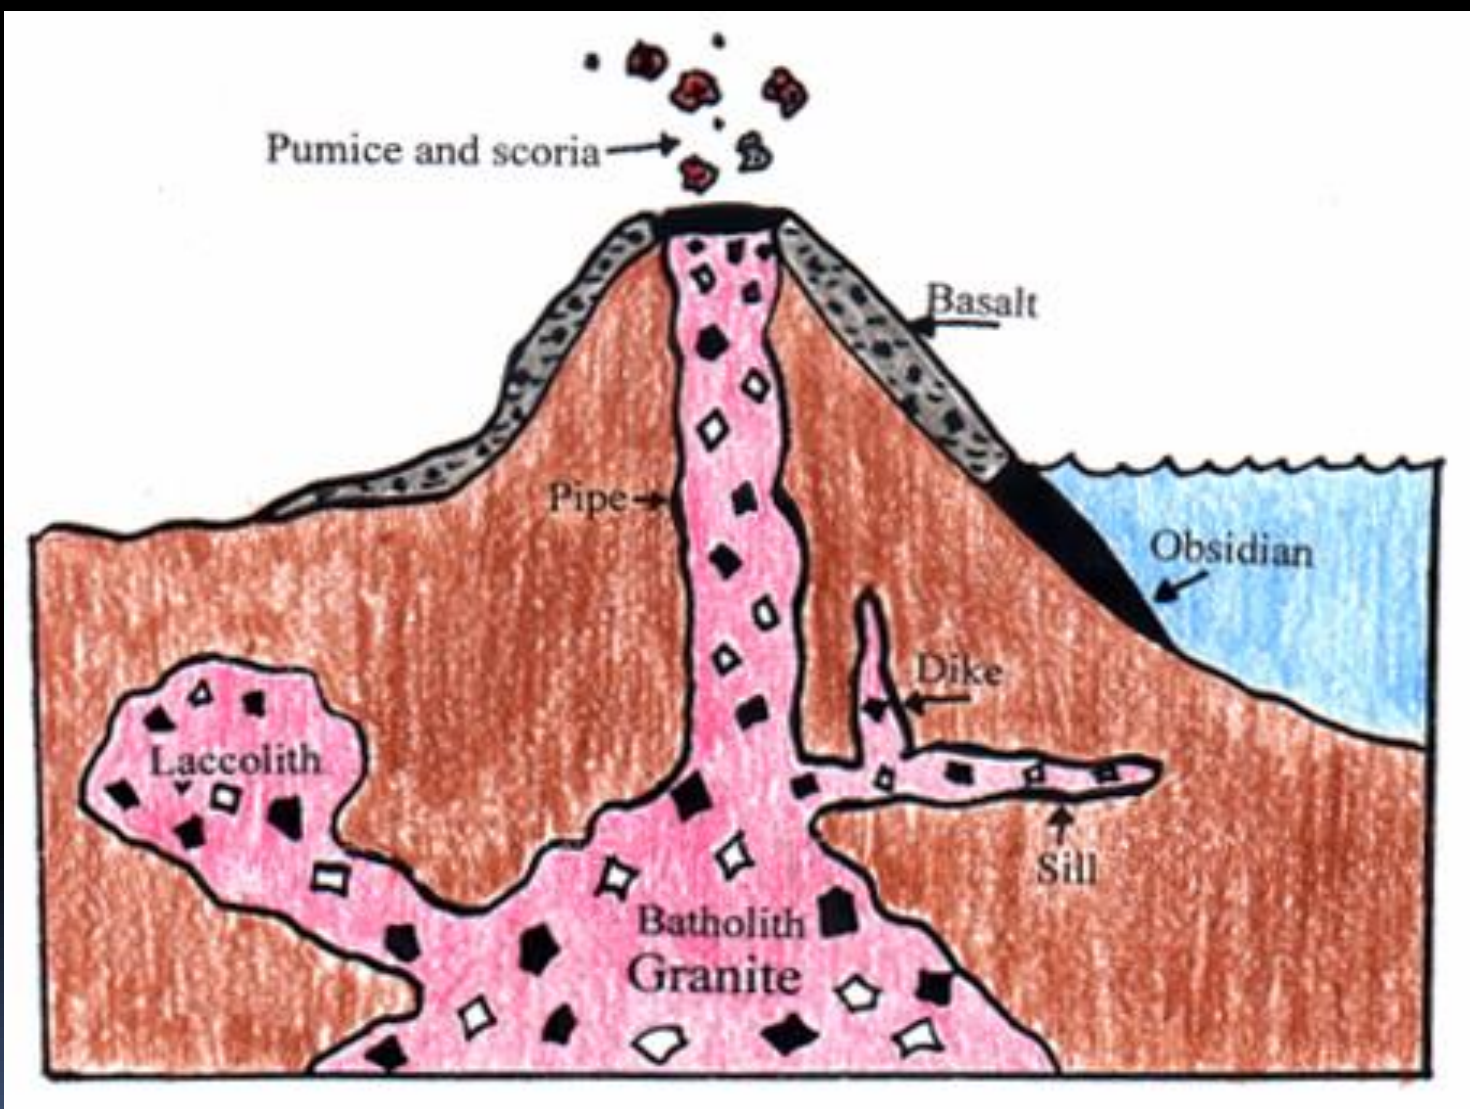





← Granite



Basalt →

# Sedimentary Rock

- Results from weathering process that being transported, redeposited, and partly or fully consolidated or cemented into a new rock.
- Sediment = loose particle material (clay, sand. Gravel, etc)
- Sediment becomes sedimentary rock through lithification, which involves:
  - 1) Compaction
  - 2) Cementation
  - 3) Recrystallization
- Can be identified easily when their layered is observable







**Shale**



**Siltstone**



**Layered gypsum**



**Quartz Sandstone**

# Metamorphic Rock

- Produced when sedimentary or igneous rocks literally change their texture and structure as well as mineral and chemical composition, as a result of heat, pressure and shear.
- Granite metamorphose to *gneiss*
- Shale → Slate → *Schist*
- Limestone → *Marble*





gneiss



schist





marble

limestone



SOIL COMPOSITION


# **BASIC PHYSICAL SOIL PROPERTIES**

# SOIL COMPOSITION

- Generally soil can be divided to three components in natural occurrence
- This separation know as three phase systems or three phase diagram
- It consists of soil solids, water and air



# Soil components in natural occurrence

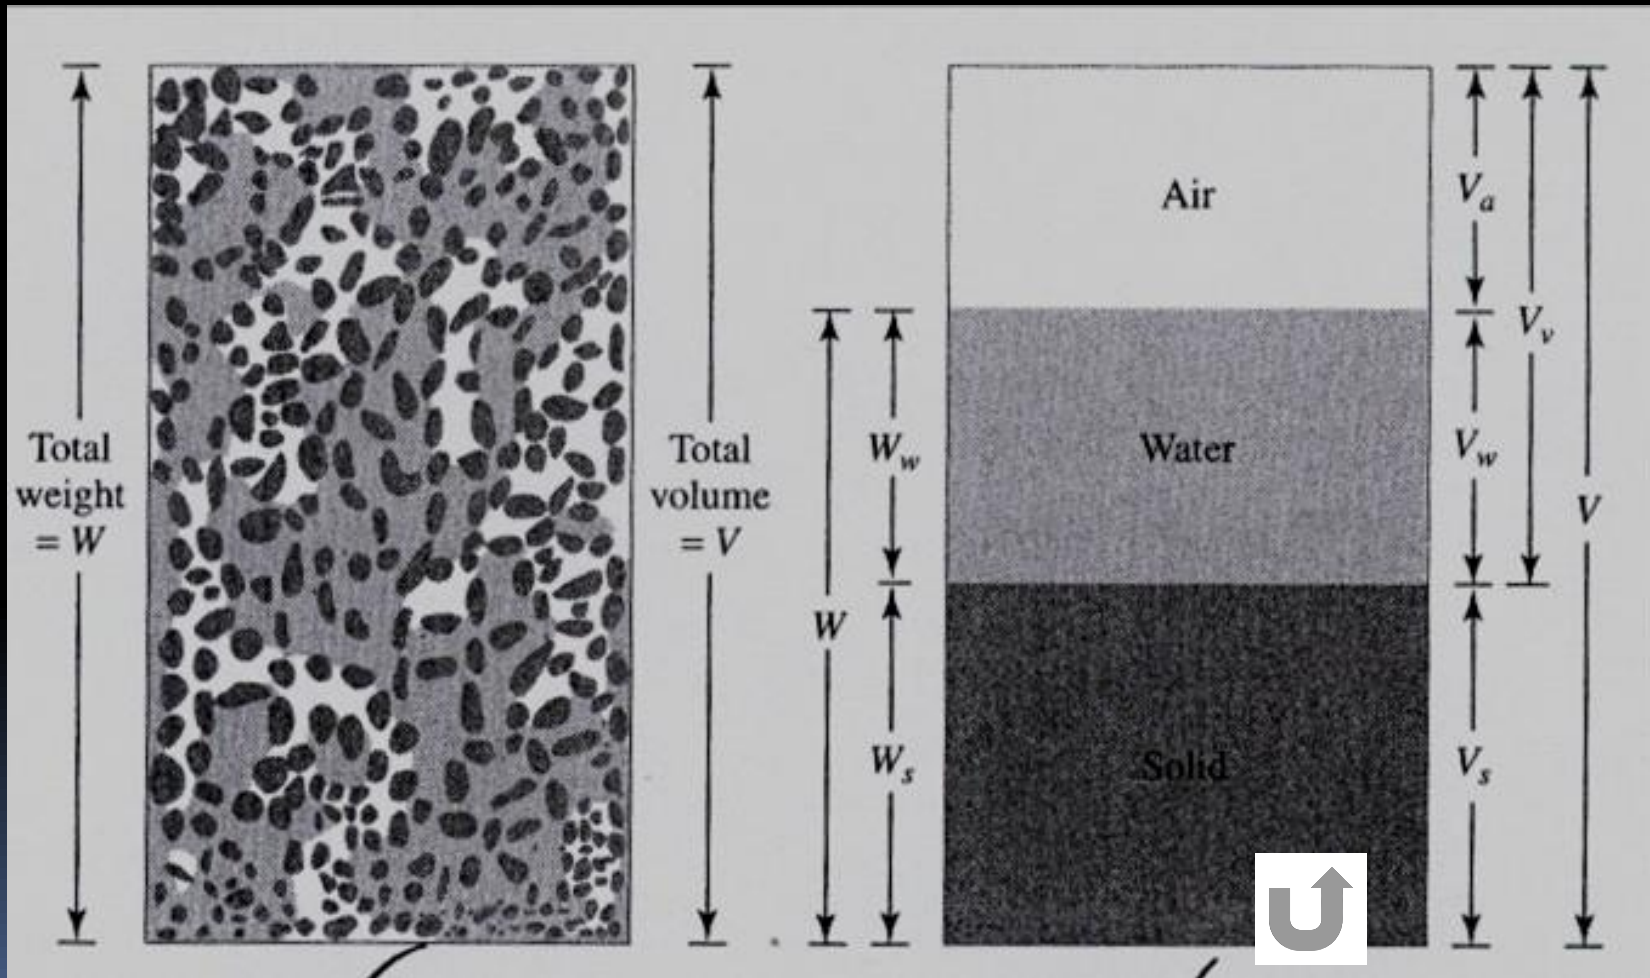


# Volume-Weight relationships

- As a result from 3 phase diagram several relationship were produce
- This relationship known as volume weight relationships.
- Refer to 3 phase diagram





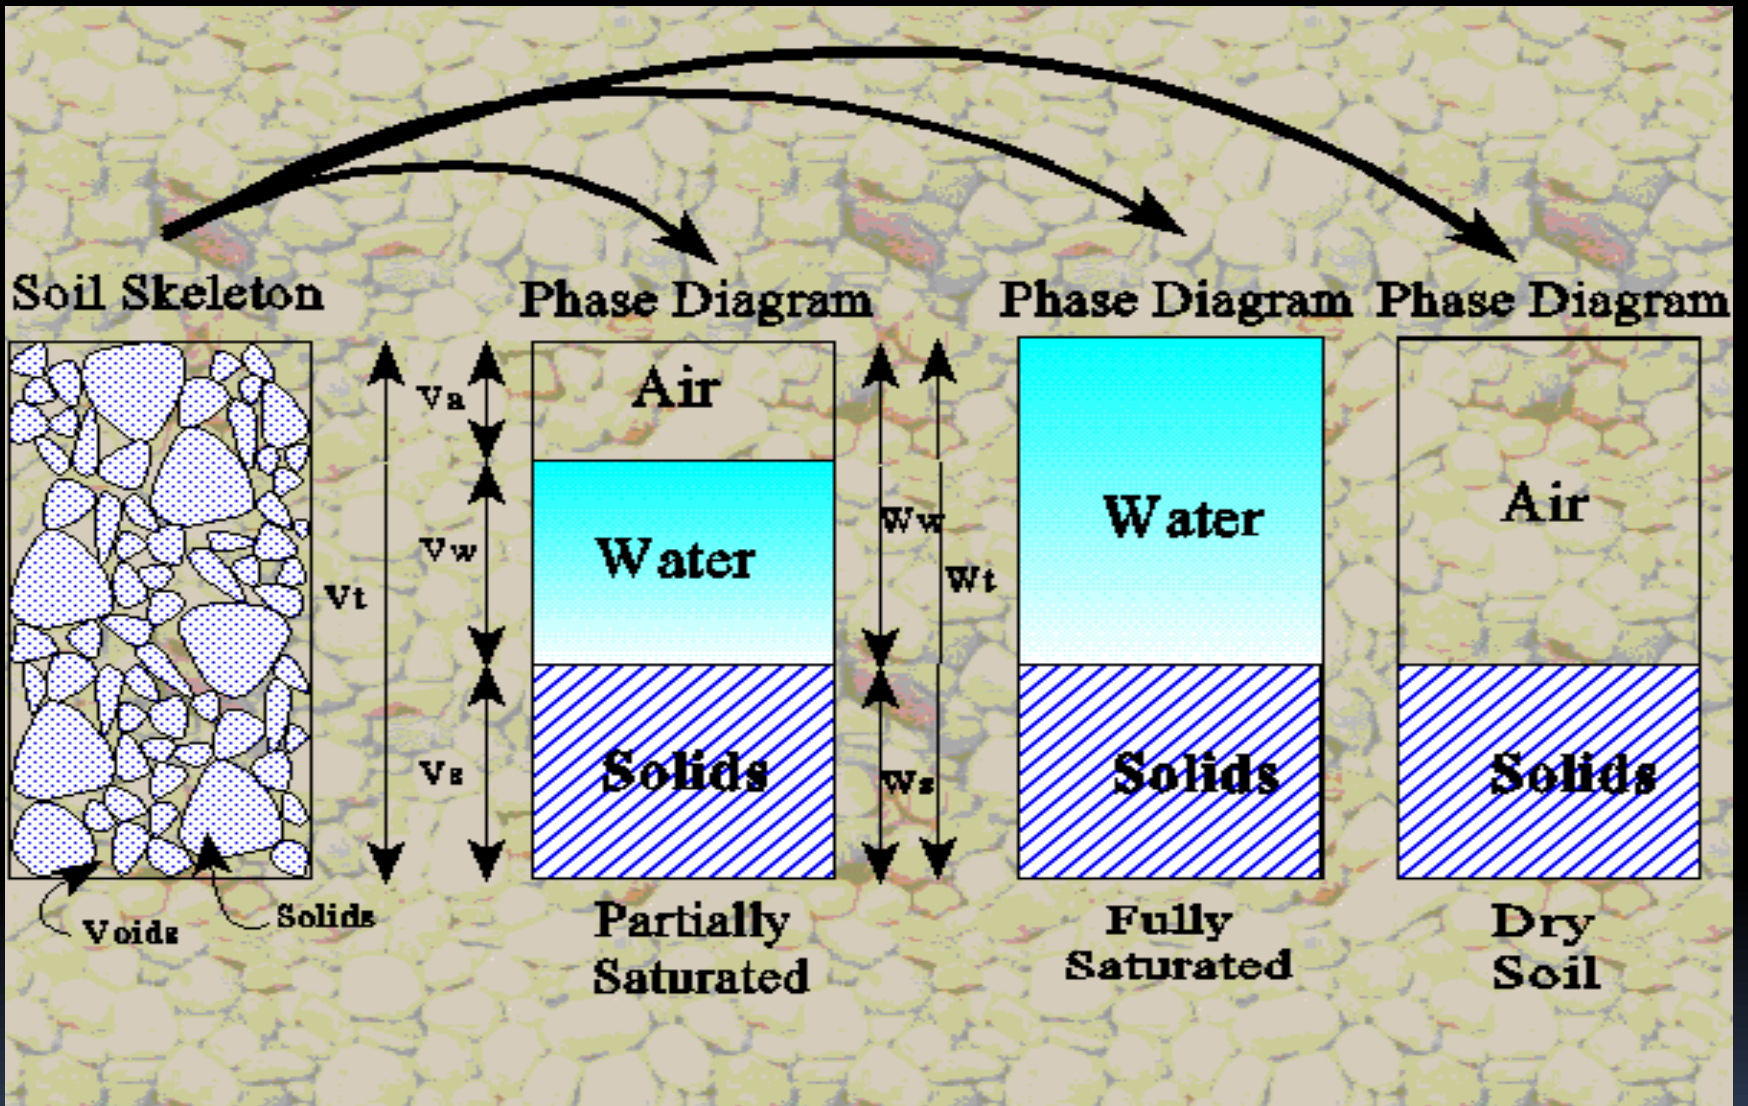

# Relationship equations

$$\begin{aligned} V &= V_s + V_v && \text{( eq. 1)} \\ &= V_s + V_w + V_a \end{aligned}$$

**where**

$V_s$  = volume of soil solids

$V_v$  = volume of voids

$V_w$  = volume of water in the voids

$V_a$  = volume of air in voids



# Relationship equations

$$W = W_s + W_w \quad (\text{eq. 2})$$

where,

$W_s =$  weight of soil solid

$W_w =$  weight of water

$W_a =$  zero (negligible)



# Void ratio, $e$

$$4- \text{Void Ratio} = e = \frac{\text{Volume of Voids } V_v}{\text{Volume of Solids } V_s}$$

The **ratio** of the **volume of voids  $V_v$**  to the **volume of soil solid  $V_s$**



# Porosity, $n$

$$5- \text{ Porosity} = n = \frac{\text{Volume of Voids}}{\text{Total Volume}} = \frac{V_v}{V_t} \times 100\%$$

The **ratio** of the **volume of voids,  $V_v$**  to **total volume,  $V$**  expressed as either a decimal or a percentage.



# Relationship between void ratio and porosity

$$e = \frac{V_v}{V_s} = \frac{V_v}{V - V_v} = \frac{(V_v/V)}{1 - (V_v/V)} = \frac{n}{1 - n}$$

$$n = \frac{e}{1 + e}$$



# Degree of saturation, $S_r$

$$6 - \text{Degree of Saturation} = S_r = \frac{\text{Volume of Water}}{\text{Volume of Voids}} = \frac{V_w}{V_v}$$

The **ratio** of the **volume of water,  $V_w$**  to the **volume of voids,  $V_v$** . It's commonly in percentage



# Water content@ Moisture content

$$3 - \text{Water Content} = W_c = \frac{\text{Weight of Water}}{\text{Weight of Solids}} = \frac{W_w}{W_s} \times 100\%$$





# Unit weight, $W$

$$\gamma_{soil} = \frac{\text{Total Weight}}{\text{Total Volume}} = \frac{W_t}{V_t}$$

The **weight of soil** per **unit volume**



# Relationship between dry unit and bulk unit weight

- $\gamma_d = \gamma / (1 + w)$




# Specific Gravity

$$G_s = \frac{W_s}{V_s \gamma_w}$$

**Specific gravity can be determined as a ratio of the weight of the soil solids to weight of water of equal volume**



# Relationships between Unit weight, Moisture Content and Specific gravity

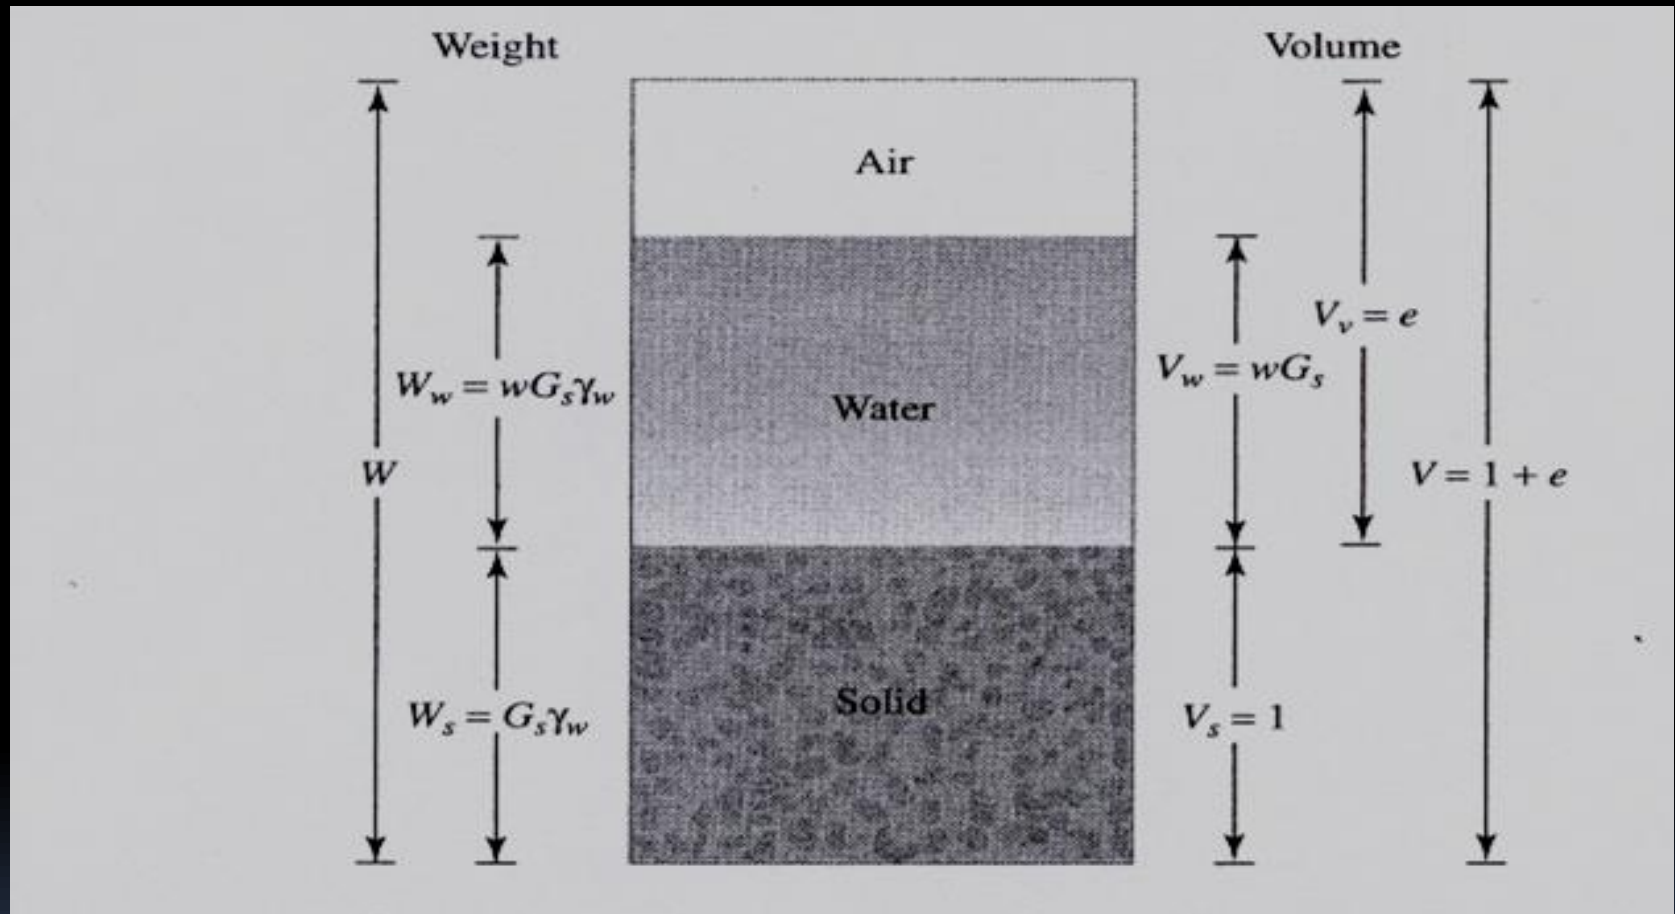

*let us consider a volume of soil in which the volume of the soil solids is one*



# Derivation of equations

Therefore  $G_s$  will be substituted as

$$W_s = G_s \gamma_w$$

$$G_s = W_s / \gamma_w = Ms / \rho_w = \gamma_s / \gamma_w$$

$$\underline{W_w} = \underline{wW_s} = \underline{wG_s \gamma_w}$$



$$\gamma = \frac{W}{V} = \frac{W_s + W_w}{V} = \frac{G_s \gamma_w + w G_s \gamma_w}{1+e} = \frac{(1+w) G_s \gamma_w}{1+e}$$

$$\gamma_d = \frac{W_s}{V} = \frac{G_s \gamma_w}{1+e} \quad \text{Therefore} \quad S = \frac{V_w}{V} = \frac{w G_s}{e}$$


How  $V_w$  become  $w G_s$ ???

$$\longrightarrow V_w = \frac{W_w}{\gamma_w} = \frac{w G_s \gamma_w}{\gamma_w} = w G_s$$



So if  $S = 1$   
(100%)

$$Se = wGs$$



$$e = wGs$$

$$\gamma_{\text{sat}} = \frac{W}{V} = \frac{W_s + W_w}{V} = \frac{Gs}{1+e} \gamma_w + \frac{e}{1+e} \gamma_w = \frac{(Gs+e)}{1+e} \gamma_w$$

Beside bulk unit weight, dry unit weight and saturated unit weight there is another type of unit weight that is submerge unit weight,  $\gamma' = \gamma_{\text{sat}} - \gamma_w$



Table 1: Void ratio, moisture content, and dry unit weight for some typical soil

Type of soil	Void ratio, $e$	Natural moisture content in a saturated state (%)	Dry unit weight, $\gamma_d$	
			lb/ft <sup>3</sup>	kN/m <sup>3</sup>
Loose uniform sand	0.8	30	92	14.5
Dense uniform sand	0.45	16	115	18
Loose angular-grained silty sand	0.65	25	102	16
Dense angular-grained silty sand	0.4	15	121	19
Stiff clay	0.6	21	108	17
Soft clay	0.9-1.4	30-50	73-93	11.5-14.5
Loess	0.9	25	86	13.5
Soft organic clay	2.5-3.2	90-120	38-51	6-8
Glacial till	0.3	10	134	21





- So what is the different between unit weight and density?
- Unit Weight is influence by gravity forces while mass isn't (Unit Weight=Weight/ Volume while Density= Mass/Volume)- Weight = Mass x Gravity acceleration
- So we can use the similar equations on related calculation if there is only density



- For example: If the equations use unit weight you must use weight in the calculation but if you are only given density you must substituted weight with mass or vice versa.

$$\text{Density} = \rho = \frac{(1 + w)G_s\rho_w}{1 + e}$$

$$\text{Dry density} = \rho_d = \frac{G_s\rho_w}{1 + e}$$

$$\text{Saturated density} = \rho_{\text{sat}} = \frac{(G_s + e)\rho_w}{1 + e}$$



- The air content,  $A$  can be expressed as
- $A = e - wGs / 1 + e$
- *or*  $A = e / 1 + e (1 - wGs/e)$
- Since  $n = e / 1 + e$
- Therefore,  $A = n (1 - Sr)$
- Beside using symbol  $A$  as air content sometimes authors use  $N_a$
- Exercise

